

Product specification

Connector Type	2 x 4.3 - 10
Type of contact	Female
Mounting kit	On-wall
Material	UV-Protect ABS, White
Operating temperature (°C)	-40 a 65
Environment humidity (%)	< 95


Electrical properties

Input Power per Port, maximum (W)	50				
Impedance (Ω)	50				
Intermodulación (3er orden @ 2 x 33 dBm) (dBc)	< -150				
Frequency range (MHz)	698-806	806-960	1710-2170	2200-2700	3300-4000
Gain (dBi)	6,0 ± 0,5	7,0 ± 0,5	8,0 ± 0,5	8,0 ± 0,5	8,5 ± 0,5
Polarization	Vertical and Horizontal				
Horizontal beam width (°)	80	80	65	60	55
Vertical beam width (°)	73	70	60	45	30
VSWR	≤ 1,8				

Reference

400499

Image

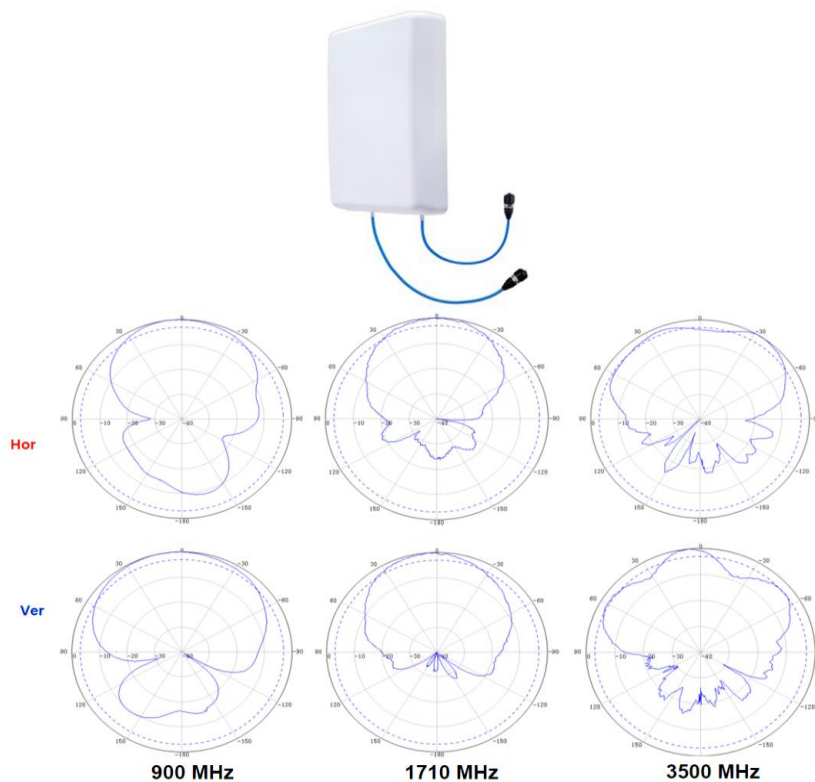

* MCC reserves the right to make the changes considered necessary in this document.