

**Product specification**

Connector Type	4.3 - 10 / N
Type of contact	Female
Mounting kit	Wall or pole
Material	ABS, White
Operating temperature ( °C )	-40 a 55
Environment humidity ( % )	

**Electrical properties**


Input Power per Port, maximum ( W )	50		
Impedance ( Ω )	50		
Intermodulación (3er orden @ 2 x 33 dBm ) ( dBc )	< -107		
Frequency range ( MHz )	698-960	1710-2700	3300-3800
Gain ( dBi )	9,0 ± 0,5	11 ± 0,5	11 ± 0,5
Polarization	Vertical and Horizontal		
Horizontal beam width ( ° )	85 ± 20		
Vertical beam width ( ° )	60 ± 15	55 ± 15	55 ± 15
VSWR	≤ 1,5		
Front to Back Ratio ( dB )	≥ 23		

**Reference**

**Connector Type**

440469	4.3 - 10
440395	N

**Image**

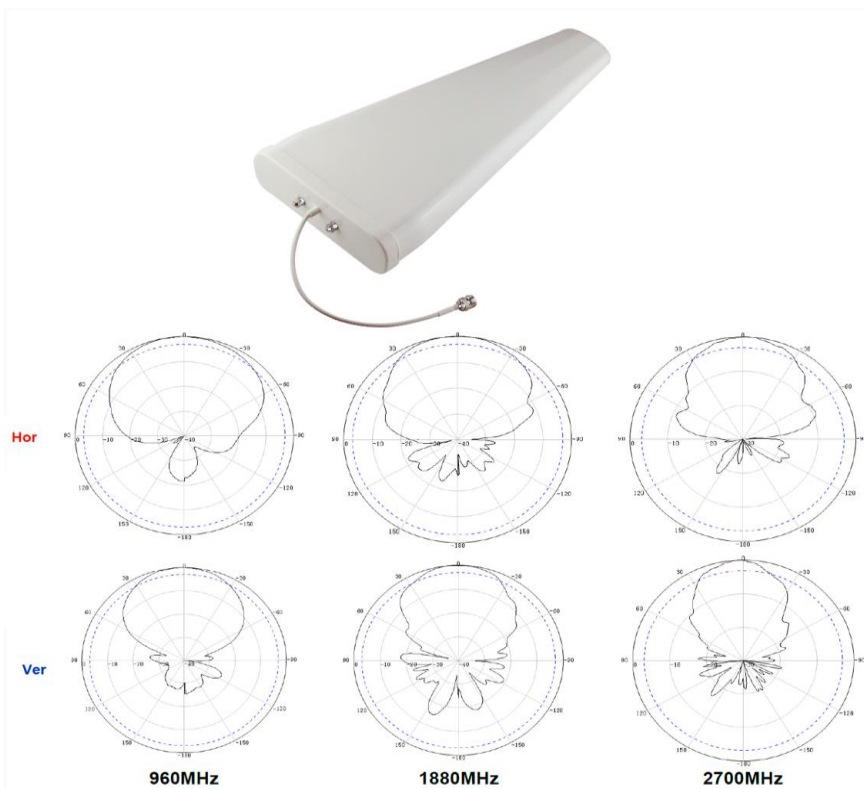

\* MCC reserves the right to make the changes considered necessary in this document.